

4




3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-	D		CHANGE LOGO, VENT HOLE; ADD LINE IDENTIFIER, CQC, PLATING THICKNESS ECO-12-005725	21-AUG-12	D.L	BH.Y

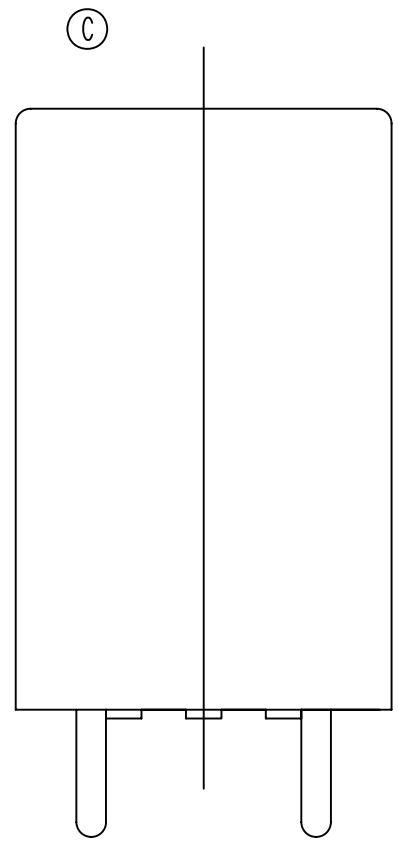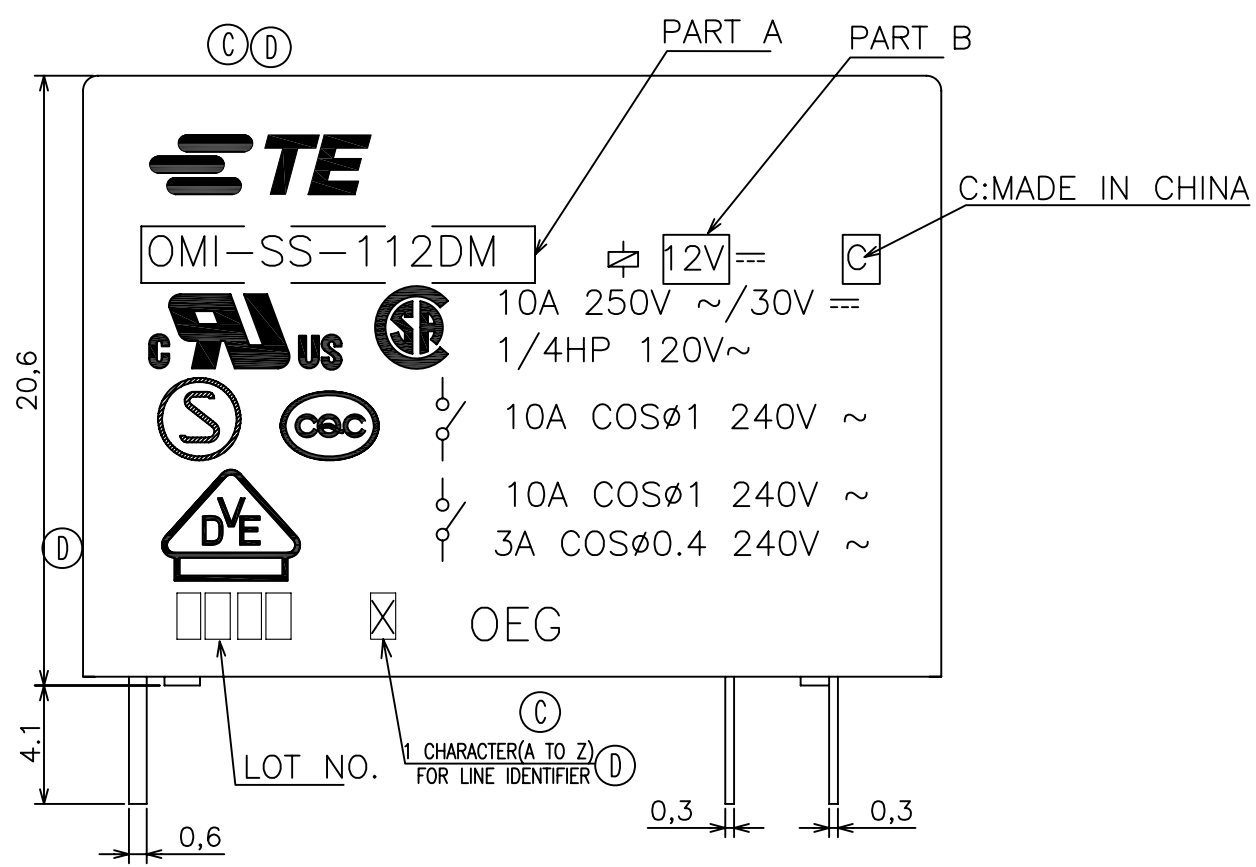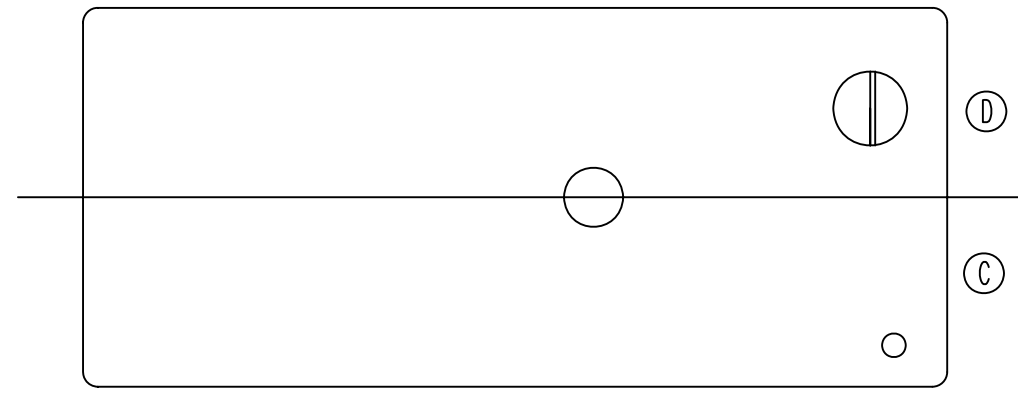


NOTES:  
 1.-SS-:PLASTIC SEALD TYPE  
 2.LOT NO. SYSTEM AS FOLLOWING:

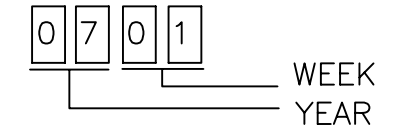

3.GENERAL TOLERANCE AS FOLLOWING:

TOLERANCE	
0~0.99mm	±0.1
1mm~2.99mm	±0.2
3mm MIN.	±0.3

④④ 4.TERMINAL DIMENSION IS NOT INCLUDING SOLDER TIP.  
 FOR THE TIN-PLATING OF THE PINS:  
 +0.1mm FOR WIDTH,THICKNESS AND DIAMETER.  
 +0.5mm FOR LENGTH.

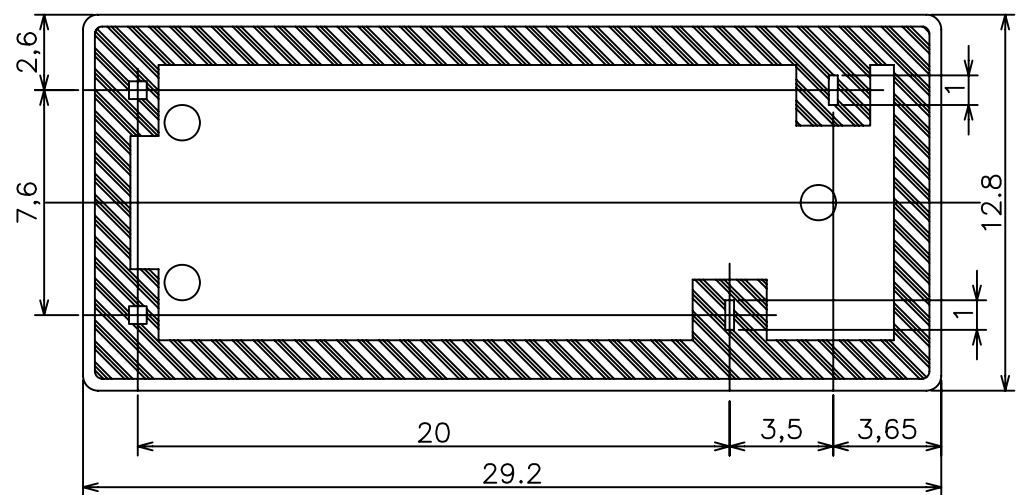

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.SASAKI		TE Connectivity	
DIMENSIONS: mm		CHK Y.OIKAWA			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.NAGAI		NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC		OMI CUSTOMER DRAWING	
MATERIAL		FINISH		APPLICATION SPEC	
		WEIGHT		SIZE	
		CUSTOMER DRAWING		A3 00779 C=1721089	
		SCALE 4:1		SHEET 1 of 2	
		REV D		RESTRICTED TO	


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-						


6-1440000-5	OMI-SS-148LM	48V	OMI-SS-148LM	⓪1
6-1440000-1	OMI-SS-124LM	24V	OMI-SS-124LM	⓪1
5-1440000-9	OMI-SS-124DM	24V	OMI-SS-124DM	⓪1
5-1440000-7	OMI-SS-112LM	12V	OMI-SS-112LM	⓪1
5-1440000-5	OMI-SS-112DM	12V	OMI-SS-112DM	⓪1
5-1440000-2	OMI-SS-106LM	6V	OMI-SS-106LM	⓪1
4-1440000-9	OMI-SS-105LM	5V	OMI-SS-105LM	⓪1
4-1440000-7	OMI-SS-105DM	5V	OMI-SS-105DM	⓪1
1721089-1	OMI-SS-103LM	3V	OMI-SS-103LM	⓪1
TE PART NO	DESCRIPTION	PART B	PART A	

RELAY TYPE

CONNECTION DIAGRAM (BOTTOM VIEW)



DRILLING DIAGRAM(2/1) (BOTTOM VIEW)

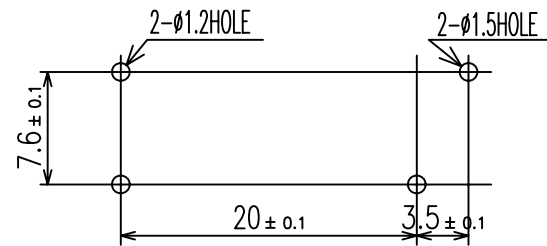

INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM
		EPOXY RESIN	RESIN	15
		PBT	CASE	14
		UEW	MAGNETIC WIRE	13
		PET	BASE	12
		PBT	BOBBIN	11
	SOLDER DIP	CP WIRE	COIL TERMINAL	10
		PPS	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag ALLOY	STATIONARY CONTACT	7
		Cu ALLOY	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	STATIONARY TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
		STEEL	CORE	3
		STEEL	ARMATURE	2
		STEEL	YOKE	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.SASAKI	TE Connectivity NAME OMI CUSTOMER DRAWING	
DIMENSIONS: mm		CHK Y.OIKAWA		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.NAGAI	PRODUCT SPEC	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC	RESTRICTED TO	
MATERIAL		WEIGHT	SIZE A3	CAGE CODE 00779
			DRAWING NO. 1721089	REV D
CUSTOMER DRAWING			SCALE 4:1	SHEET 2 of 2